

Backlit LED panel

for NA customers



Features


- Energy saving up to 40% compared to conventional light sources
- Even light distribution, low flicker
- 5-year warranty
- Optional features
 - Efficiency 110/130lm/W
 - CRI 80/90
 - Low glare diffuser UGR < 19
 - Switchable CCT 3000/4000/5000K
 - Additional energy saving through proximity sensor/ daylight harvesting
 - Emergency battery 3W * 3 hours



Only 30mm thick



Choice of frames

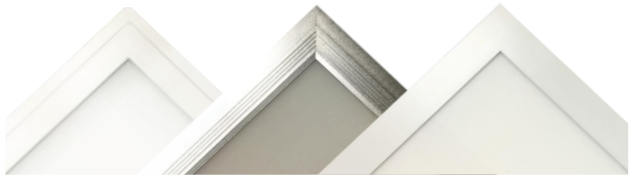

Sizes

Model	Size	Power	Luminance
EVE-PL66-40	603*603*30mm	40W	4400lm
EVE-PL312-40	301*1213*30mm	40W	4400lm
EVE-PL612-50	603*1213*30mm	50W	5500lm

Standard specification

Optical	
Lumen Output	4400 – 5500lm
Colour Temperature	4000K
Colour Rendering Index	80
Beam Angle	120°
Electrical	
Supply Voltage	100 - 277V/100 - 377V, 50 - 60Hz
Input Power	40 – 50W
Dimming	1 – 10V
Power Factor	0.9

Electrical (continued)	
LED Lamp	SMD
IP Rating	IP20
Physical	
Construction	Steel, aluminium, PS
Operational	
Operating Temp	-22°F to +104°F
Lifespan	50,000hrs
Certification	DLC, ETL

About us

DanHui Lighting Electron (Hangzhou) Co., Ltd is specialized in designing and manufacturing the LED Lights. Our products include: LED Bulb lights, LED Panel lights, LED Down lights, LED Linear lights etc. Our LED lighting products have been successfully exported to more than 10 countries

Contact us

- info@danhuiled.com
- +86-571-85390096
- www.danhuilux.com