Track Light

for European customers





Features



Energy saving up to 40% compared to conventional light sources

Even light distribution, low flicker, no yellowing



5-year(3 years+2years) extended warranty Optional features

- Efficiency 90lm/W
- CRI 80/90
- Low glare diffuser UGR < 19
- 350° rotation and 90 °tilt
- Constructed from High Thermal Conductivity Plastic and die casting alluminum
- Flame resistant diffuser TP(a) / UL94 V0


Choice of Color



Sizes

Model	Size	Power	Luminance
DH-TL060-ECO	φ60*125*50mm	7W	630lm
DH-TL070-ECO	φ70*140*50mm	10W	950lm
DH-TL080-ECO	φ80*185*50mm	20W	1750lm
DH-TL090-ECO	φ90*210*50mm	30W	2500lm

Dimensions



Standard specification

Optical			
Lumen Output	3000– 4500lm		
Colour Temperature	3000K/4000K/5000K/6500K		
Colour Rendering Index	80/90		
Beam Angle	24°/40°		
Electrical			
Supply Voltage	220-240V, 50-60Hz		
Input Power	7-30W		
Dimming	Optional traic/1-10V/Dali		
Power Factor	0.9		

_			-		
Δ	h	n	IIŤ	ш	S

DanHui Lighting Electron (Hangzhou) Co., Ltd is specialized in designing and manufacturing the LED Lights. Our products include: LED Bulb lights, LED Panel lights, LED Down lights, LED Linear lights etc. Our LED lighting products have been successfully exported to more than 10 countries

Electrical (continued)		
LED Lamp	SMD	
IP Rating	IP20	
Physical		
Construction	Aluminium, PS	
Operational		
Operating Temp	-30°C to +40°C	
Lifespan	Up to 50,000hrs	
Certification	CE, RoHS	

Contact us

Allie@danhuiled.com

(+86-187-26206972


www.danhuilux.com

Track Light

Quality Design




Exploded View

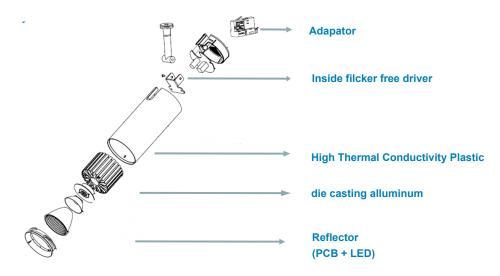

Adaptor



Temperature test



→TS0090 Highest 93.8 ℃ →TS0060 Highest 75 ℃

